11x8ft Rectangular Single Top Offset Umbrella

Assembly and User Manual

ITEM: UMB-920170
#M29384

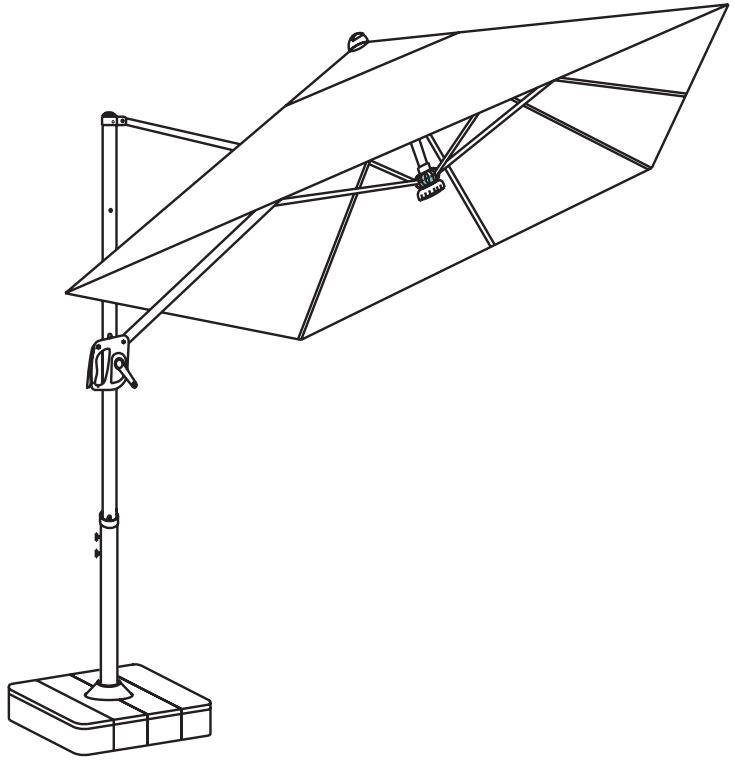

The schematics in this manual are for assembly and operation illustration only. They may differ from the umbrella's actual appearance.

If you have any questions, problems or need additional parts please **do not return** to the place of purchase. Contact our customer service department toll free at **1-855-880-7205** or email us at **customerservice@atleisure.com**

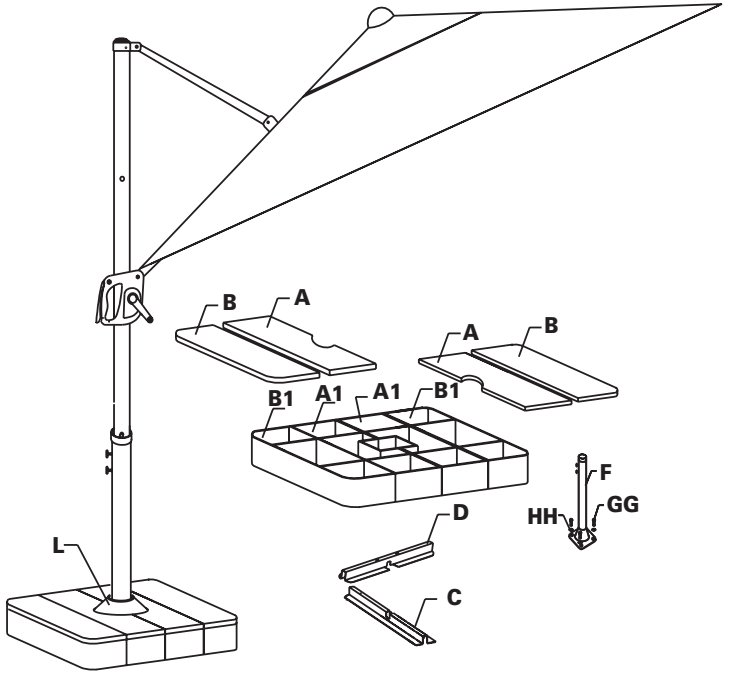

PART	DESCRIPTION	QTY(PC)
A	Base Cover A	2pcs
A1	Base A1	2pcs
B	Base Cover B	2pcs
B1	Base B1	2pcs
C	Lower Cross Leg (with bolts and washers)	1pc
D	Upper Cross Leg (with bolts and washers)	1pc
F	Holder Pole (with control knob)	1pc
L	Pole Support Cup	1pc
N	Umbrella Frame (with canopy and holder pole ring)	1pc

3. Hardware Contents |

PART	PICTURE	DESCRIPTION	QUANTITY
GG		Hex Bolt M10-1.5x20 A2-70	4pcs (in the blister pack)
HH		Flat Washer M10 A2-70	4pcs (in the blister pack)

PREPARATION
Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list. If any part is missing or damaged, do not attempt to assemble the product or return to the place of purchase. Contact our customer service toll free at **1-855-880-7205** for replacement parts or further instructions.

Tools Required for Assembly: Open End Wrench or Adjustable Wrench (not included)

| Assembly Instructions 4.

Remove all protective materials. Be careful not to throw away small parts such as screws, washers, etc. that may be wrapped in the protective materials.

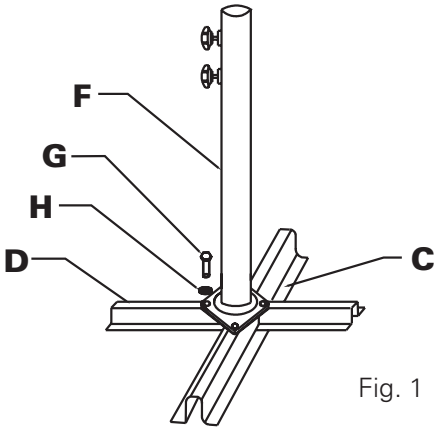

Fig. 1

Step 1. Place the Upper Cross Leg (D) over the Lower Cross Leg (C) to form an "X". Attach the Holder Pole (F) to the cross legs (C & D) with the Screws (G) and Washers (H) (found in blister pack) as shown in Fig.1.

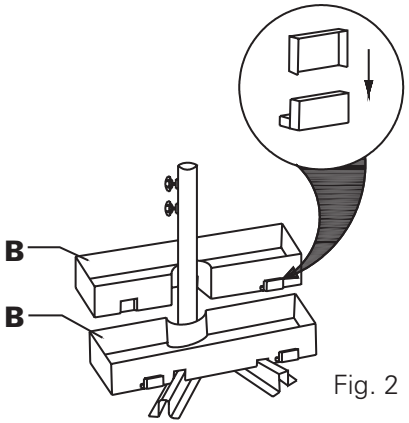

Fig. 2

Step 2. Align the tabs with the slots on each base (B) and then slide the base pieces together until they lock firmly, as shown in Fig.2.

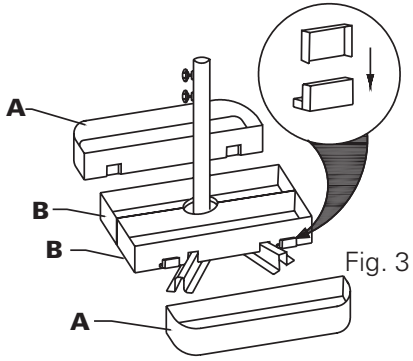

Fig. 3

Step 3. Attach the Outer Injection Molded Base (A) to the Inner Injection Molded Base (B) by locking the tabs into the slots as shown in Fig. 3.

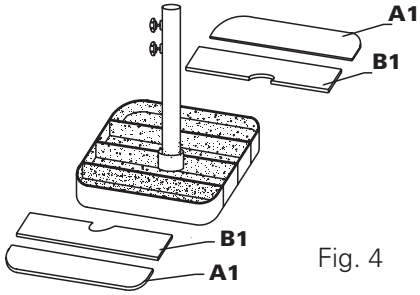

Fig. 4

Step 4. Fill the injection molded bases with water, then put the Injection Molded Cover (A1 & B1) onto the InjectionMolded Base (A & B) accordingly as shown in Fig. 4.

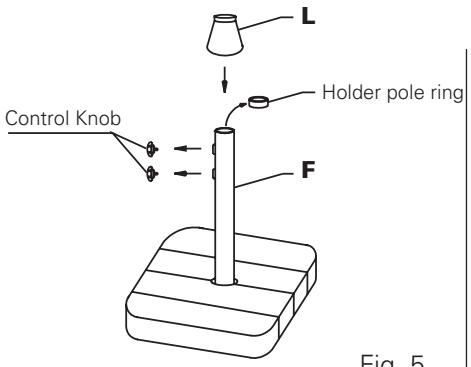

Fig. 5

Step 5. Remove the Control Knobs and Holder Pole Ring from the Holder Pole (F) and then insert the Pole Support Cup (L) over the Holder Pole until it lays on the base. Replace the Holder Pole Ring onto the Holder Pole (F).

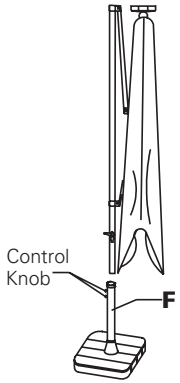

Fig. 6

Step 6. Now you are ready to secure the umbrella to the injection molded base by tightening the control knobs as shown in Fig. 6.

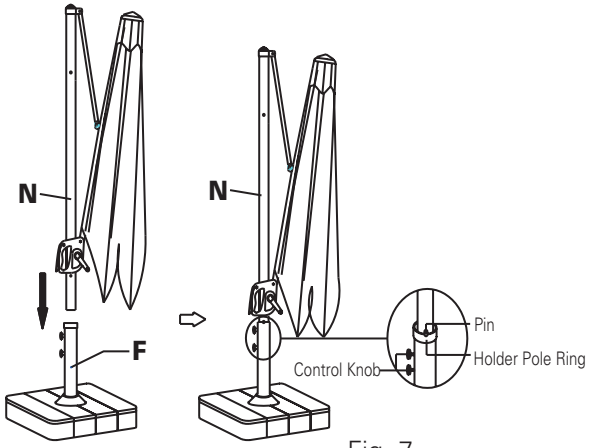

Fig. 7

Insert the main pole of the Umbrella Frame with Canopy (N) into the Holder Pole (F) until the lower fixed stop pin sits on the Holder Pole Ring as shown in Fig. 7. Tighten the two control knobs into the Holder Pole (F) to secure the umbrella as shown in Fig. 7

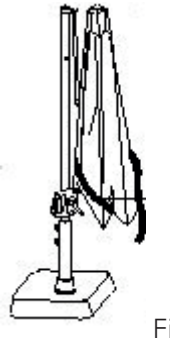

Fig. 8

Step 1. Unfasten the storage straps around the canopy as shown in Fig 8.

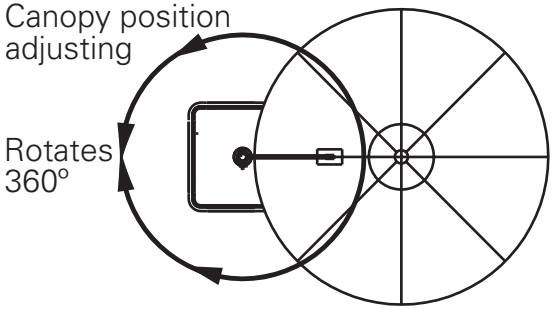

The umbrella has a unique design that moves the pole out of your way and off to the side. The multiple position canopy can rotate 360°around the axis of the main pole to offer the shade on your expected area around the umbrella as shown in Fig. 8.

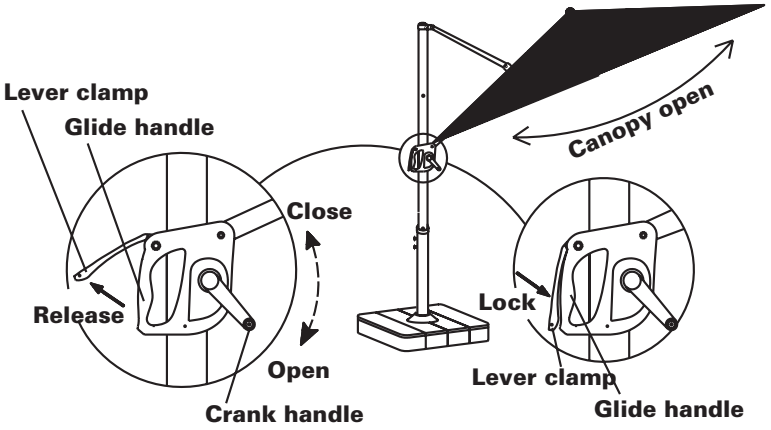

Fig. 9

Step 2. Open the umbrella for the first time: Pull out the lever clamp to release the glide handle as shown in Fig 9; grasp and slide the glide handle up along the umbrella pole; turn the crank handle in the open direction as shown in Fig. 9 to open the canopy until the lower center hub reaches the end of the support pole where the canopy has the proper tension. Push down the lever clamp to lock the glide handle against the umbrella pole as shown in Fig.9 where it determines a canopy tilt angle.

If the crank becomes too hard to crank, check to see if the rope has come off the pulley. If you continue to turn the crank, the rope could break.
Contact our customer service toll free at **1-855-880-7205** for further assistance.

1. Do not use this umbrella during periods of high wind and rain. Failure to do so may result in personal injury and/or property damage.

2. Be sure to secure and/or weight the base of the umbrella with at least 200 lbs of weight to prevent the umbrella from tipping over.

3. Always take the umbrella down when not in use.

4. Placement of the umbrella over or near a swimming pool can cause premature fading of the canopy. This is not covered under our warranty.

5. To prevent damage to the canopy, open the umbrella facing the opposite direction that the wind is blowing.

CANOPY CARE INSTRUCTIONS:
Simply clean the umbrella canopy with a soft brush and mild detergent.
Do not machine wash.
Do not iron.
Air dry the canopy thoroughly before storing for extended periods of time.
Make sure the canopy is completely open during drying process to prevent shrinkage.

9. Warranty |

90–DAY WARRANTY
This product is covered under a manufacturer's 90-day warranty from date of purchase against defects in materials and workmanship. This warranty does not cover damage due to neglect, abuse or weather related damage. For full warranty disclosure, email us at **customerservice@atleisure.com.**

HOW TO FILE A CLAIM
If you are within your warranty, to file a claim you must have your receipt and pictures of your damaged umbrella. Email information to ATLeisure at **customerservice@atleisure.com**.

This ATLeisure product is covered by U.S. Patent No. 5,937,882.

| Replacement Parts 10.

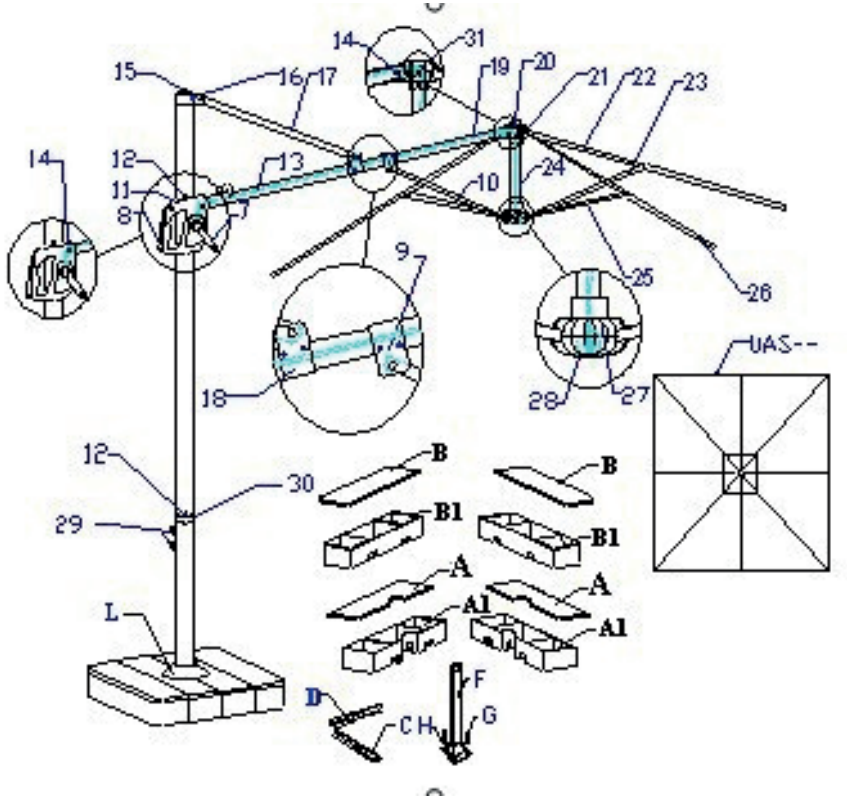

Contact our customer service department toll free at **1-855-880-7205** or email us at **customerservice@atleisure.com**

11. Replacement Parts (cont'd) |

No.	Description	Qty.	Re-order No.	No.	Description	Qty.	Re-order No.
A	Base Cover A	2pcs	BSE-AIM-BRZ	16	Top Collar	1pc	TPC-1658-BRZ
A1	Base A1	2pcs	BSE-A1IM-BRZ	17	Short Main Arm	1pc	SMA-1711X8-BRZ
B	Base Cover B	2pcs	BSE-BIM-BRZ	18	Main Bracket	1pc	BKT-1811X8-BRZ
B1	Base B1	2pcs	BSE-B1IM-BRZ	19	Long Main Arm	1pc	LMA-1911X8-BRZ
C	Lower Cross leg	1pc	CSL-C58X-BRZ	20	Decorative Canopy Cap	1pc	DCC-20-BRZ
D	Upper Cross Leg	4pcs	CSL-D58X-BRZ	21	Upper Rib Holder	1pc	URH-2111X8-BRZ
F	Holder Pole	4pcs	HDP-F58X-BRZ	22	Corner Rib	3pcs	CNR-2211X8-BRZ
GG	Bolt	1pc	HDW-GG-SLVR	23	Under Corner Rib	3pcs	UCR-2311X8-BRZ
HH	Washer	1pc	HDW-HH-SLVR	24	Rib Holder Support Bar	1pc	RHB-2411X8-BRZ
L	Pole Support Cup	1pc	PSC-L58-BRZ	25	Under Side Rib	4pcs	USR-2511X8-BRZ
7	Crank	1pc	CRK-758G-BRZ	26	Side Rib	4pcs	SDR-2611X8-BRZ
8	Lever clamp	1pc	CRK-758G-BRZ	27	Lower Rib Holder	1pc	LRH-2711X8-BRZ
9	Main Short Rib Bracket	1pc	BKT-911X8-BRZ	28	Lower Rib Holder Cap	1pc	RHC-2811X8-BRZ
10	Main Short Rib	1pc	MSR-1011X8-BRZ	29	Control Knob	2pcs	HDW-29CK
11	Glide Handle	1pc	CRK-758G-BRZ	30	Holder Pole Ring	1pc	HPR-3058-BRZ
12	Stop Pin	2pcs	STP-58-SLVR	31	Upper Rib Holder Pulley	1pc	URP-3111X8-BRZ
13	Rope	1pc	RPE-13ST	UAS	Canopy	1pc	CAN-11X8O8RBO-HG,TO,BR,TAN
14	Main Pole Pulley	1pc	MPP-1458-BRZ				
15	Pole Top Decorative Cap	1pc	PCP-1548-BRZ				

This ATLeisure product is covered by U.S. Patent No. 5,937,882 and U.S. Patent No. 8,104,492.

atleisure®
create your escape

www.atleisure.com
ATLANTA, GEORGIA
Customer Service Toll Free 1-855-880-7205
Monday through Friday from 8:00am-5:00pm
(Eastern Time)